
www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System


PSMS

A professional weighing&packing products manufacturer and supplier

Platform Scale Mild Steel











Rubber Nut
Prevent uneven weighing pan



Rubber Adjust Feet
Support basement & leveling ground



Mounting Plate
Mounting load cell



Tube
Connected between scale body and indicator, stainless steel material



Size	Capacity	Load cell	Indicator
30*30(cm)	Up to 100kg	Mavin/Zemic brand	Novo/Other designated brand
30*40(cm)	Up to 100kg	Mavin/Zemic brand	Novo/Other designated brand
40*50(cm)	Up to 200kg	Mavin/Zemic brand	Novo/Other designated brand
50*50(cm)	Up to 300kg	Mavin/Zemic brand	Novo/Other designated brand
45*60(cm)	Up to 300kg	Mavin/Zemic brand	Novo/Other designated brand
50*60(cm)	Up to 300kg	Mavin/Zemic brand	Novo/Other designated brand
60*80(cm)	Up to 500kg	Mavin/Zemic brand	Novo/Other designated brand

- *Steel tube welded platform (round/square tube selectable)*
- *Plastic powder coated finish*
- *Stainless steel cover(round/square corner selectable)*
- *With four rubber adjust feeet*
- *Qualified load cell(Mavin/Zemic/Other designated brand)*
- *Qualified indicator(Novo/Other designated brand)*

Weighing

NOVO


A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice


PSSS

A professional weighing&packing products manufacturer and supplier

Platform Scale Stainless Steel











Rubber Nut
Prevent uneven weighing pan



Perfect Welding
Ensure strongness



Stainless Steel Mounting Plate
Mounting load cell



Stainless Steel Adjust Feet
Support basement & leveling ground



Size	Capacity	Load cell	Indicator
30*30(cm)	Up to 100kg	Mavin/Zemic brand	Novo/Other designated brand
30*40(cm)	Up to 100kg	Mavin/Zemic brand	Novo/Other designated brand
40*50(cm)	Up to 200kg	Mavin/Zemic brand	Novo/Other designated brand
50*50(cm)	Up to 300kg	Mavin/Zemic brand	Novo/Other designated brand
45*60(cm)	Up to 300kg	Mavin/Zemic brand	Novo/Other designated brand
50*60(cm)	Up to 300kg	Mavin/Zemic brand	Novo/Other designated brand
60*80(cm)	Up to 500kg	Mavin/Zemic brand	Novo/Other designated brand

- *Stainless steel tube welded platform (round/square tube selectable)*
- *Polishing finish*
- *Stainless steel cover(round/square corner selectable))*
- *With four stainless steel adjust feet*
- *Stainless steel or rubber load cell cover optional*
- *Qualified load cell(Mavin/Zemic/Other designated brand)*
- *Qualified indicator(Novo/ Other designated brand)*

Weighing

NOVO


A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System

I-CARP

A professional weighing&packing products manufacturer and supplier

Waterproof Platform Scale

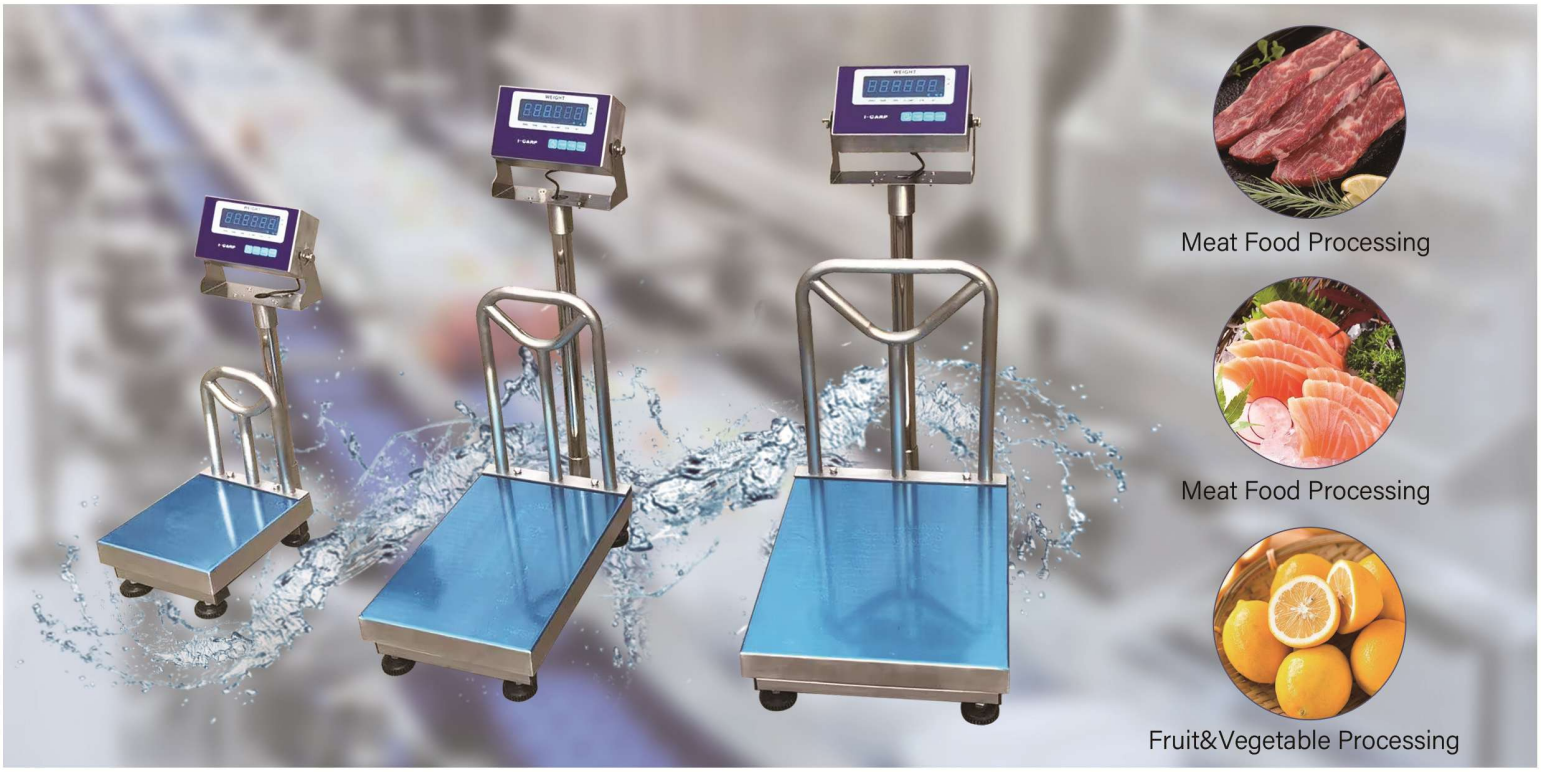

Parameter	Capacity	Size
I-Carp	30kg	25*30 cm
	60kg	30*45 cm
	100kg	35*40 cm
	300kg	40*50 cm
	500kg	50*60 cm
Power Supply	AC 220V/50HZ DC 4V/4AH rechargeable battery	
Material	Full stainless steel	
Display	6-bit LED	
Working Temperature	-10℃~40℃	
Working Humidity	⩽100%	
Tare Range	100% full span	

Features

- *Weighing indicator IP68 rated for wash down*
- *Weighing indicator stainless steel housing applied for food industry*
- *6-bit LED display*
- *KG/LB/Vlss unit switch by key*
- *External calibration*
- *Zero tracking*
- *Factory default parameter reset*
- *Able to set up weighing speed and anit-vibraton level*
- *Able to set up LED brightness*
- *Low battery auto power off*
- *Ideal for applications including high humidity surrounding of foodor seafood markets, food processing factories, delicatessens or anyother use*

NOVO

A professional weighing&packing products manufacturer and supplier
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

Weighing

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System


SBS

A professional weighing&packing products manufacturer and supplier


Stamping Bench Scale




Front view -mild steel series




Side view-mild steel series



Front view -stainless steel series



Side view-stainless steel series



Specification

Model	Max Capacity (kg)	A(mm)	B(mm)	D(mm)	E(mm)
STMS-2525-6~30	6~30	250	250	110	300
STMS-3030-30~60	30~60	300	300	110	300
STMS-3040-30~150	30~150	300	400	110	400
STMS-4040-30~150	30~150	400	400	110	600
STMS-4050-30~150	30~150	400	500	110	600

Model	Max Capacity (kg)	A(mm)	B(mm)	C(mm)	E(mm)
STSS-2525-6~30	6~30	250	250	90	300
STSS-3030-30~60	30~60	300	300	90	300
STSS-3040-30~150	30~150	300	400	90	400
STSS-4040-30~150	30~150	400	400	90	600
STSS-4050-30~150	30~150	400	500	90	600

Features

Mild steel series

- *5mm mild steel plate is stamped at one time without welding*
- *Mild steel surface is treated with shot blasting, spraypaint processing*
- *Stainless steel cover surface is polished and wire drawn*
- *Round pole connection*
- *Aluminum alloy load cell*
- *Adjustable rubber feet*
- *Plastic housing indicator selectable*

Stainless steel series

- *5mm stainless steel plate is stamped at one timewithout welding*
- *Stainless steel surface is polished and wire drawn*
- *Two-layer loading plates are hermetically sealed,moisture-proof and waterproof*
- *Square pole and round pole selectable indicator angle*
- *Aluminum load cell/stainless steel load cell selectable*
- *Adjustable stainless steel feet*
- *Stainless steel housing indicator selectable*

NOVO

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

RS

A professional weighing&packing products manufacturer and supplier

Roller Scale



Size(cm)	Max Capacity	Division
30*40	100kg	20g
40*50	150kg	50g
50*60	300kg	100g
60*70	500kg	100g
60*80	500kg	100g

- *Widely used in assembly line and logistics area*
- *Mild steel and stainless steel structure are both available*
- *φ50 or φ38 stainless steel rollers.*
- *Quick indicator connection, plentiful communication type selectable*
- *Weighing capacity ranges from 10kg□500kg*
- *Customized scale dimension according to application*

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice


CS

A professional weighing&packing products manufacturer and supplier

Chicken Scale









Industry (chemical plants, dyeing and finishing plants, food,packaging plants), agriculture, animal husbandry, commercial weighing

Model-Pan size(mm)	Tube size(mm)	Platter thickness	Capacity	Division
TCS-CK-400*400	30*30*1.2	S.S 201 1.0mm	150kg	20g
TCS-CK-400*500	30*30*1.2	S.S 201 1.0mm	200kg	50g
TCS-CK-500*600	40*40*2.0	S.S 201 1.2mm	500kg	100g
TCS-CK-600*800	40*40*2.0	S.S 201 1.2mm	600kg	100g

- *No pole, and the product has a compact design for easy transport.*
- *Standard MAVIN high-precision loadcell (optional zemi, Keli..)*
- *Four adjustable non-slip and wear-resistant rubber feet*
- *Various indicators can be selected (eg:Yaohua, Caisun, Dini arge..)*
- *Heavy- duty design, real materials, sturdy and durable.*
- *Welding is firm and beautiful.*
- *Customizable products (Appearance,structure,capacit..)*
- *High strength screw(DONGLUO SCREWS)*
- *Tall scale stand for weighing in higher positions*
- *Comes with a handle for easy movement*

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

MBS

A professional weighing&packing products manufacturer and supplier

Movable Bench Scale









Model-Pan size(mm)	Tube size(mm)	Platter & Thickness	Max Capacity	Division
TCS-MB-400*500	30*30*1.2	S.S 201 1.0mm	200kg	50g
TCS-MB-500*500	40*40*2.0	S.S 201 1.2mm	300kg	50g
TCS-MB-450*600	40*40*2.0	S.S 201 1.2mm	300kg	50g
TCS-MB-500*600	40*40*2.0	S.S 201 1.2mm	500kg	100g
TCS-MB-600*600	40*40*2.0	S.S 201 1.2mm	500kg	100g
TCS-MB-600*800	40*40*2.0	S.S 201 1.2mm	600kg	100g

- *Mild steel and stainless steel structure are both available.*
- *Resistant rudder with handle-bar*
- *Durable wheels, two of them are with breaks*
- *High precision Mavin/Zemic load cell*
- *Quick indicator connector, Optional RS-232C data interface provides the ideal basis for communication.*

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System

PS

A professional weighing&packing products manufacturer and supplier

Portable Scale






Handle for easy carry




Anti-smooth foot for high load



Bluetooth to connect with PDA and mobile



RS232 to connect with computer



Size(mm)	Max Capacity	Division
220*300	100kg	20g
280*280	100kg	20g
300*400	200kg	20g

- *Mild steel and stainless steel structure are both available*
- *With compact structure and galvanized handle*
- *Beautiful appearance with high rigidity*
- *Equipped with high precision load cells*
- *Equipped with intelligent indicator with plentiful communication type*
- *Weighing capacity ranges from 20kg to 200kg*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice


www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System

SDFS

A professional weighing&packing products manufacturer and supplier


Single Deck Floor Scale







Mass Production




Stainless Steel Junction Box



Qualified Load Cell With Feet



Level Bubble For Easy Leveling



M12 Haning Ring For Easy Transit



Size	Capacity	Load cell	Indicator
0.8*0.8(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.0*1.0(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.2*1.2(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.2*1.5(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.5*1.5(m)	Up to 5T	Mavin/Zemic brand	Novo/ Other designated brand
1.5*2.0(m)	Up to 5T	Mavin/Zemic brand	Novo/ Other designated brand
2.0*2.0(m)	Up to 5T	Mavin/Zemic brand	Novo/ Other designated brand
2.0*3.0(m)	Up to 10T	Mavin/Zemic brand	Novo/ Other designated brand

Mild Steel/ Stainless Steel

- *Strong structure, mild steel/ stainless steel material selectable*
- *Chequer plate platform, plastic powder coated finish (for mild steel)*
- *Chequer plate /smooth plate platform selectable,polish finish (for stainless steel)*
- *4 load cell construction(Mavin/Zemic/Other designated brand)*
- *Qualified indicator(Novo/ Other designated brand)*
- *Stainless steel junction box*
- *Ramp optional*
- *5m cable supplied*

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System


DDFS

A professional weighing&packing products manufacturer and supplier

Double Deck Floor Scale











Size	Capacity	Load cell	Indicator
0.8*0.8(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.0*1.0(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.2*1.2(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.2*1.5(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.5*1.5(m)	Up to 5T	Mavin/Zemic brand	Novo/ Other designated brand
1.5*2.0(m)	Up to 5T	Mavin/Zemic brand	Novo/ Other designated brand
2.0*2.0(m)	Up to 5T	Mavin/Zemic brand	Novo/ Other designated brand
2.0*3.0(m)	Up to 10T	Mavin/Zemic brand	Novo/ Other designated brand

Mild Steel/ Stainless Steel

- *Double deck, applied for pit/pitless base*
- *Strong structure, mild steel/ stainless steel material selectable*
- *Chequer plate platform, plastic powder coated finish (for mild steel)*
- *Chequer plate /smooth plate platform selectable,polish finish (for stainless steel)*
- *Qualified load cell(Mavin/Zemic/Other designated brand)*
- *Qualified indicator(Novo/ Other designated brand)*
- *Stainless steel junction box*
- *Ramp optional*
- *5m cable supplied*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System

LPFS

A professional weighing&packing products manufacturer and supplier

Low Profile Floor Scale









Size	Capacity	Load cell	Indicator
0.8*0.8(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.0*1.0(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.2*1.2(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.2*1.5(m)	Up to 3T	Mavin/Zemic brand	Novo/ Other designated brand
1.5*1.5(m)	Up to 5T	Mavin/Zemic brand	Novo/ Other designated brand

- ◆*Ultra low profile, easy for loading goods*
- ◆*With 2 ramps integrated with scale body (single deck)*
- ◆*With 2 ramps connected with scale body(double deck)*
- ◆*Mild steel/stainless steel selectable*
- ◆*Chequer plate platform, plastic powder coated finish (for mild steel)*
- ◆*Chequer plate /smooth plate platform selectable,polish finish (for stainless steel)*
- ◆*Qualified load cell(Mavin/Zemic/Other designated brand)*
- ◆*Qualified indicator(Novo/ Other designated brand)*
- ◆*Stainless steel junction box*
- ◆*5m cable supplied*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

WS

A professional weighing&packing products manufacturer and supplier


Wheelchair Scale








Ramp design for easy get on/off



Robust handrail more reliable



Anti-smooth design for better safety



Customized scale dimension according to application

Size(mm)	Ramp(mm)	Max Capacity	Division
800*800	300	300kg	100g
800*1000	300	300kg	100g
1000*1000	300	300kg	100g

- *Widely used in hospital for dialysis*
- *Mild steel and stainless steel structure are both available*
- *Designed handrails and slope convenient for patients to get on/off*
- *Weighing capacity ranges from 50kg to 1000kg*
- *Equipped with four high precision load cells*
- *Equipped with intelligent indicator with plentiful communication type to access printer, mobile, pc etc.*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

WB

A professional weighing&packing products manufacturer and supplier

Weighing beam

Mild steel




Stainless steel




(Up to 2T Size: 1.2*0.12*0.08m or customized)

Handles for portability



Precision load cell



With rollers for easy move



M12 fixed feet



- *Zero, tare, accumulate*
- *Weighing, counting, checking, sorting*
- *Printing and communication interface:RS232/RS485 (optional)*
- *Large screen display interface: serial RS232 output (optional)*
- *Analog output: 0-20mA/4-20mA/0-5V (optional)*
- *Relay output: 4 relay outputs (optional)*
- *Sound and light alarm (optional)*
- *U-shaped steel structure with M12 fixed feet*
- *Equipped with handles and rollers, easy to move*
- *Carbon steel surface treated with shot blasting,anti-corrosion*
- *Stainless steel surface polished and wire drawn*
- *Precision load cells for accurate weighing results every time*
- *Low profile beams to allow easy weighing of pallets using pallet trucks*
- *Lightweight with handles for portability*
- *Simple user-friendly operation*
- *Hold function*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

AS

A professional weighing&packing products manufacturer and supplier

Animal Scale



Size(mm)	Fence(mm)	Max Capacity	Division
1200*1200	1200	1000kg	200g
1200*1200	1200	1500kg	500g
1200*1500	1200	1000kg	500g
1200*1500	1200	2000kg	500g
1500*1500	1200	1500kg	500g
2000*2000	1200	2500kg	500g

- *Guardrail easy installed*
- *Size can be customized*
- *Two doors added to both sides for efficient working*
- *Indicator with animal mode ensures accurate weighing data*
- *Equipped with four high precision load cells*
- *Weighing capacity ranges from 100kg to 3000kg*
- *Equipped with intelligent indicator with plentiful communication type*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com

Scales&Parts Weighing System

Packers&Parts Packing System

TS

A professional weighing&packing products manufacturer and supplier


Truck Scale










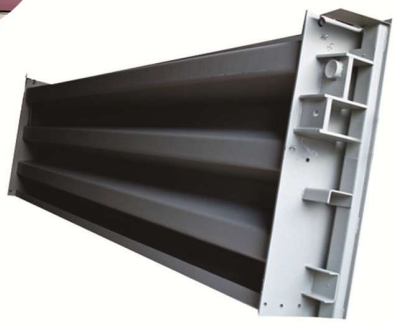

Steel Raw Material



CNC Cutting



U beam Production



Assembly Location



CNC Automatic Welding



CNC Hot-blasting



Airless Spraying



Delivery Inspection



Model	TS-20	TS-30	TS-50	TS-60	TS-80	TS-100	TS-120	TS-150
Max. Capacity	20T	30T	50T	60T	80T	100T	120T	150T
Division	10KG	10KG	20KG	20KG	20KG	20KG	20KG	50KG
Load cell Capacity	10T	20T	20T	20T	30T	30T	30T	40T
Platform Size Width*Length(M)	Optimization Specification							
2*4	●							
3*7	●	●						
3*9		●	●	●				
3*10		●	●	●				
3*12		●	●	●				
3*14			●	●	●			
3*15			●	●	●	●		
3*16			●	●	●	●	●	
3*18				●	●	●	●	
3.4*14				●	●			
3.4*16				●	●	●	●	
3.4*18					●	●	●	●
3.4*21					●	●	●	●

- *Capacity 10T-200T*
- *Accuracy class: OIML(III)*
- *Safe overload: 150%*
- *High-strength U-beam structure*
- *Thickness of smooth plate (8-12mm), chequer plate selectable*
- *Anti-rust spray paint*
- *High quality load cell(Mavin/Zemic/Other designated brand)*
- *Multi-function weighing indicator((Novo/ Other designated brand)*
- *Durable shield cable*
- *Ramp or rail optional*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System

CARP

A professional weighing&packing products manufacturer and supplier

Waterproof Weighing Scale





Meat Food Processing



Seafood Processing



Accurate Weight



Adjustable feet



Load Cell Bracket



Staineless Steel Pan



Fruit&Vegetable Processing

Parameter	Capacity	Division
Carp	1.5KG	0.2g
	3KG	0.5g
	6KG	1g
	15KG	2g
	30KG	5g
Power Supply	AC 220V/50HZ ;DC 6V/5AH rechargeable battery	
Platter Size	304 full stainless steel,230*200mm	
Display	6-bit LED	
Working Temperature	-10℃~40℃	
Working Humidity	≦100%	
Tare Range	100% full span	

- *IP68 rated for wash down*
- *ABS housing conform to HACCP food safe standard*
- *6-bit LED dual side display*
- *Non-slip adjustable feet and level indicator*
- *External calibration*
- *Zero tracking*
- *Factory default parameter reset*
- *Able to set up weighing speed and anti-vibration level*
- *Able to set up LED brightness*
- *Able to set up weight unit kg/g*
- *Low battery auto power off*
- *Ideal for applications including high humidity surrounding of food or seafood markets, food processing factories, delicatessens or any other use*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System

SHARK

A professional weighing&packing products manufacturer and supplier

Waterproof Weighing Scale






Meat Food Processing




Seafood Processing



Silicon Sealed Mainboard



Leoch Battery



Adjustable feet



Gap Easy for Clean



Fruit&Vegetable Processing

Parameter	Capacity	Division
Shark	1.5KG	0.75/1.5kg:0.2/0.5g
	3KG	1.5kg/3kg:0.5/1g
	7.5KG	3/7.5kg:1/2g
	15KG	7.5/15kg:2/5g
	30KG	15/30kg:5/10g
Power Supply	AC 220V/50HZ ;DC 6V/5AH rechargeable battery	
Platter Size	food level plastic tray, 182*266mm	
Display	6-bit LED	
Working Temperature	-10℃~40℃	
Working Humidity	≦100%	
Tare Range	100% full span	

- *Easy operation, easy maintenance*
- *Durable and reliable*
- *Non-slip adjustable feet and level indicator*
- *High accuracy, fast reaction*
- *Food level plastic housing and platter, applied for food industry*
- *Waterproof housing design, washable*
- *PCB silicon sealed, moisture proof*
- *Protection devices against overload and shock*
- *6-bit LED dual display, LED brightness adjustable*
- *Passed 168 hours salty fog test*
- *Ideal for applications including high humidity surrounding of food or seafood markets, food processing factories, delicatessens or any other use*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com

Scales&Parts Weighing System

Packers&Parts Packing System

BPPS

A professional weighing&packing products manufacturer and supplier

Barcode Printing Pricing Scale TM-F




Arm installation free



Reliable thermal printer set
Both for recipt and label



Matching software



Customized Language Avaiable



Technical Parameters

Model: TM-F
Accuracy:1/3000
Cap/division: 3KG/1G 6KG/2G 15KG/5G 30KG/10G
Display:High bright RED or GREEN LED&LCD display
*Label size recommend: 30*40mm 37*50mm 40*50mm 40*60mm（customized label size available)*
Label paper core diameter:25mm
Max. printing width:56mm
Printing speed:75mm/s
Interface:Serial RS232 port/ Ethernet port /WIFI communication 4G(optional)/money box port (optional)

Features

- *Dual sided display*
- *Display ARM installation free*
- *Store up to 4000 commodity information, 142 commodity shortcut keys*
- *PLU information rich in content*
- *Transmit data to the scale through host computer*
- *Support label and recipt printing*
- *Label format,PLU content, reports etc can be set up by matching software*
- *Various static report can be reported*
- *Support connection of all cash registers on the market*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System


AI-BS

A professional weighing&packing products manufacturer and supplier

AI Barcode Scale TM-F66




Arm installation free



Reliable thermal printer set
Both for recipt and label



Matching software



Customized Language Avaiable



Technical Parameters

Model: TM-F66
Accuracy:1/3000
Cap/division: 3KG/1G 6KG/2G 15KG/5G 30KG/10G
Display: Touch screen
*Label size recommend: 30*40mm 40*60mm（customized label size available)*
Label paper core diameter:25mm
Max. printing width:56mm
Printing speed:110mm/s
*Interface:1*Ethernet, 1*RS232, 1*Drawer, 2*USB,cash box port*

Features

- *10.1 inch display*
- *Display ARM installation free*
- *PLU information rich in content*
- *Support label and recipt printing*
- *Label format,PLU content, reports etc can be set up by matching software*
- *Various static report can be reported*
- *Support connection of all cash registers on the market*
- *OS:Android 11.0*
- *CPU:Rockchip RK3566UPto1.8GHz*
- *Memory:RAM 2GB RAM 4G*
- *Storage:16GB*
- *Camera pixel: 5 maga-pixel*
- *Power:AC 100～240V 50～60Hz*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com

Scales&Parts Weighing System

Packers&Parts Packing System

UHWBS

A professional weighing&packing products manufacturer and supplier

Ultrasonic height weight body scale



Ultrasonic height sensor



High light LED dispaly screen



Foldable body



RS-232 port & Double wheels



Specification

Height range /division	20-210CM/0.1CM
Height measure system	Ultrasonic height sensor
Weight range / division	1-300KG/0.1KG
Weight measure system	High precision weight load cell
Working voltage	110-220V(50-60HZ)
Standby power	⩽10w
Optional functions	Thermal printer

Features

- *Non-contact ultrasonic height measurement*
- *High-precision resistance strain type industrial-grade load cell to measure weight*
- *Automatically calculate and display theinternational general body mass index (BMI)Automatically display the date, time, andambient temperature*
- *Multilingual voice operation guidance,real-time broadcast of measurement results*
- *High-brightness large-size LED digital tube display*
- *Temperature automatic compensation function*
- *RS-232 interface output, optional Bluetooth*
- *High-speed thermal printing measurement results (SY-301 only)*

NOVO

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com

Scales&Parts Weighing System

Packers&Parts Packing System

CS

A professional weighing&packing products manufacturer and supplier

Coffee scale



High precision load cell 0.1g



Precise timer to seconds




Silicon pad selectable



USB charge



- *Size:136*165*28mm*
- *Display:LED*
- *Divison:0.1g*
- *Power:3.7V chargable*
- *Capacity:0.3-2000g*

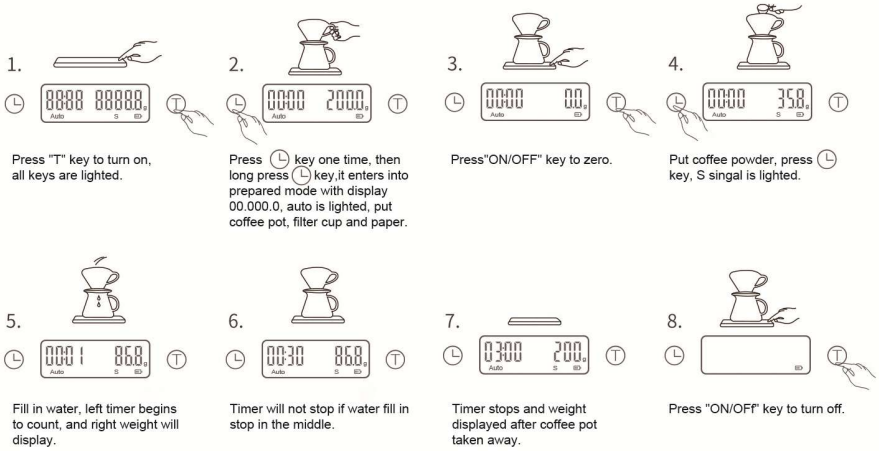

NOVO


A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

Weighing

PS

A professional weighing&packing products manufacturer and supplier

Pet Scale

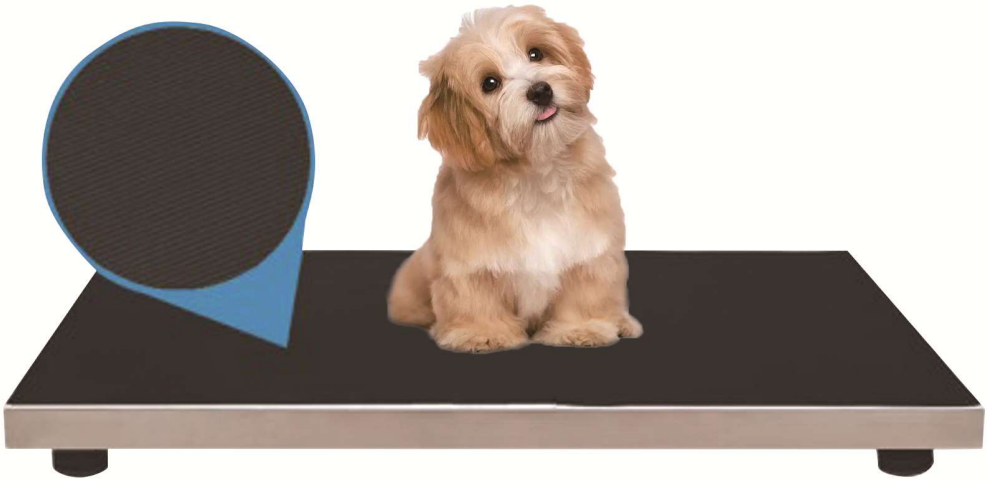

Animal mode weighing indicator



High precision load cell



Handle for easy carry



Size(mm)	Max Capacity	Division
500*700	150kg	50g
500*900	150kg	50g

- *Ultra low design for pets to get on/off*
- *With stainless steel waterproof and dust proof plate*
- *Portable structure, with handle and moveable wheels*
- *Equipped with four high precision load cells*
- *Indicator with animal mode ensures accurate weighing data*
- *Weighing capacity ranges from 100kg to 3000kg*
- *Equipped with intelligent indicator with plentiful communication type*

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice


IPS

A professional weighing&packing products manufacturer and supplier

Integrated Pet Scale




8.5MM thickness tempering glass

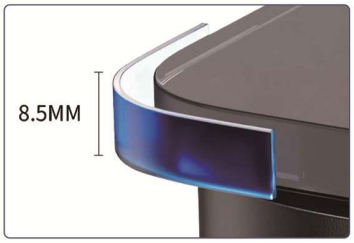

Aluminum frame to ensure strongness



G type load cell for high presicion

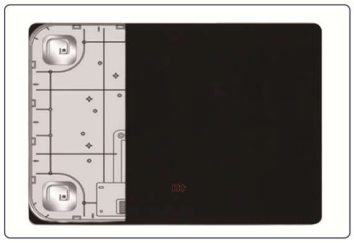

Size(mm)	Max Capacity	Division
400*650	100kg	5g
500*800	100kg	5g
500*800	200kg	5g

- *Weighing capacity ranges from 50g to 100kg（dry battery type）*
- *Weighing capacity ranges from 50g to 200kg（charging type）*
- *High strongness tempering glass of platform*
- *LED display*
- *Auto turn off for low power consumption*

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

MDDS

A professional weighing&packing products manufacturer and supplier

Mechanical Double Dial Scale



Cutomized logo



Wheel for easy move



Side rail for protection



Model	Max.	Division	Bearing Platform(cm)	Overall Dimension(cm)	NW.(kg)	GW.(kg)
TTZ	50kg	100g/4oz	40×30	60×31×99	19	21
	100kg	200g/0.5Lb	40×30	60×31×99	19	21
	150kg	0.5kg/1Lb	40×30	60×31×99	19	21
	200kg	0.5kg/1Lb	40×30	60×31×99	19	21
S-TTZS	150kg	0.5kg/1Lb	60×45	91×54.5×123	38	39.5
	200kg	0.5kg/1Lb	60×45	91×54.5×123	38	39.5
	300kg	1kg/2Lb	60×45	91×54.5×123	38	39.5
	500kg	1kg/2Lb	60×45	91×54.5×123	38	39.5
S-TTZB	300kg	1kg/2Lb	80×60	117×72×126	70.5	73.5
	500kg	1kg/2Lb	80×60	117×72×126	70.5	73.5
	1000kg	2kg/5Lb	80×60	117×72×126	70.5	73.5

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System

MPS

A professional weighing&packing products manufacturer and supplier

Mechanical Platform Scale



Powder coating platform



Strong steel wheel



One total set



Full copper ruler



Model	Size(mm)	Package		Gross		Net
		Wooden	Carton	Wooden	Carton	
MPF-100	300*400	67*45*15	63*44*11.5	25.5	25	23
MPF-300	450*600	97*62*20	93*57*16.5	67	63	61
MPF-500A	450*600	97*62*20	93*57*16.5	69	65	63
MPF-500S	600*640	97*76*20	93*72*18	93	89	85
MPF-1000	600*800	120*77*22	116*73*18	132	128	122
MPF-2000	1000*1100	161*118*25		343		310

- *Material: Cast Iron*
- *Display Type: Copper ruler(steel ruler optional)*
- *Packing: Wooden/Carton*
- *Pole: Square pole*
- *Color: Green/Orange*
- *Weight: Standard KG (LB optional)*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System

VSSS

A professional weighing&packing products manufacturer and supplier

Vietnam style spring scale




Robust design



Flat/round pan selectable



Customized



Customzied color or logo



Capacity	Material	Tray sizy	Product net weight	Product size	Inner packing	Carton meas	20"container	40"container
1kg/5g,2kg/10g, 3kg/10g,5kg/20g	Body:Painted steel Tray:201# stainless steel	21×3.6cm	1350g±10g	15.5×13×22.5cm	1PC/1brown box	56×43×44.5cm/12pcs G.W/N.W: 19/18kg	3120pcs	7560pcs
10kg/50g,15kg/50g, 20kg/100g	Body:Painted steel Tray:201# stainless steel Platform 2:spray paint steel Platform 3:410# stainless steel	27×4.5cm Platform size:24×24cm	3.5kg	24×18×31.5cm 27×18×27cm		58×50×29.5cm/4pcs G.W/N.W: 15.5/14kg	1300pcs	3160pcs
30kg/100g,40kg/100g, 50kg/100g	Body:Painted steel Platform :spray paint steel Platform :410# stainless steel	24×24cm	4.5kg	29×21×27cm		59×47×29.5cm/4pcs G.W/N.W: 18/16kg	1380pcs	3320pcs
60kg/200g,100kg/200g, 150kg/500g	Body:Painted steel Platform :spray paint steel Platform :410# stainless steel	33×33cm/33×45cm	9.0kg	36.7×25×35.5cm		60.5×38×38cm/2pcs G.W/N.W: 20/18kg	636pcs	1560pcs

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice


SCS

A professional weighing&packing products manufacturer and supplier

Spring Crane Scale



Strong spring




More choice



Mirror light processing



Customized



Model	Capacity	Material body	Salver	N.W G.W	Packing	Carton size
SV-25	25kg	Painted steel		1.35kg/1.6kg	10pcs/ctn	380*355*245mm
SV-50	50kg			1.35kg/1.6kg	10pcs/ctn	380*355*245mm
SV-100	100kg			1.35kg/1.6kg	10pcs/ctn	380*355*245mm
BR-10	10kg		Stainless steel	1.6kg/1.75kg	4pcs/ctn	430*325*235mm
BR-10 (Double)	10kg		Stainless steel	1.6kg/1.75kg	4pcs/ctn	430*325*235mm
BR-150	150kg			2.5kg/2.7kg	4pcs/ctn	430*325*235mm
BR-200	200kg			2.5kg/2.7kg	4pcs/ctn	430*325*235mm

- *Precise weighing,every gram is mastered.*
- *Easy to operate,more accurate measurement.*
- *Clear scale display,simple and convenient reading.*
- *High quality steel plate.*
- *High precision spring.*
- *Double side display.*

NOVO

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System


SSIWBIP

A professional weighing&packing products manufacturer and supplier


SS Indicator With Built-In Printer




Front View



Back view



Side view



Optional

RS485 Analog Output

Technical parameter

- *Power supply voltage: DC power supply, 9VDC±10%*
- *Battery voltage: Li-ion battery,7.4V*
- *Power consumption: DC power supply,<4W, typical:1W(with one load cell)*
- *Insulation resistance: ⩾100MQ (500v DCMEGA reference)*
- *Dielectric strength: 2000V AC(test condition: 50/60Hz,1 minute)*
- *Operating ambient temperature, humidity, installation location:-10℃～40℃,35~85% R-H without condensation.ndoor altitude <2000m*
- *Load cell power supply: DC 5V±2%, 200mA(MAX)*
- *Input impedance: >10MQ*
- *Zero adjustment range: 0 to 5mV*
- *Gain input range: 1 to 10mV*
- *Conversion method: Sigma-Delta*
- *Weight update rate: 30 times/sec*
- *Non-linearity:±0.003% F-S (15bps)*
- *Gain drift <10ppm/℃(use the matching terminal connector when connecting the load cell o t willworsen theTemperaturedrift characteritics)*
- *Maximum display accuracy: 1/100000*
- *Number of divisions: 100~100000*
- *Input Signal: Proportional measurement with 4/6-wire strain gauge load cell.*
- *Load cell loading capacity: up to four 350 ohm analogue load cells.*

Function

- *Stainless steel housing, carbon steel housing optional with built in bluetooth printer;*
- *6-bit green LED display with 18mm height*
- *Durable membrane keyboard*
- *High precision 24 bit A/D converter*
- *Basic weighing, checkweigher,simple counting,animal weighing, peak-hold function*
- *A variety of installation methods, applicable to platform scale, floor scale*
- *Two independent serial communication ports, one port occupied by bluetooth for connecting built in printer; another RS232(standard), or other optional communication method*
- *Lithium battery for durable use*
- *Max 55mm paper width for lable or recipt*
- *Label format download by computer or phone app (Andirod) set up*

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com

Scales&Parts Weighing System

Packers&Parts Packing System

LC


Load Cell

A professional weighing&packing products manufacturer and supplier

mavin



KELI

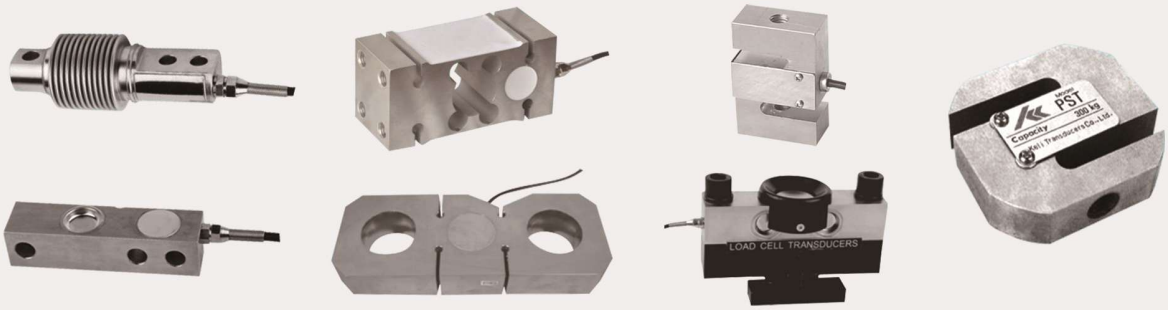

ZEMIC



- *ZEMIC/KELI/MAVIN etc. all kinds of brand available with competitive price*
- *Aluminum alloy material/steel alloy material/stainless steel material*
- *Single point type/shear beam type/s type/bridge type/wheel type/column type etc.*
- *Analog and digital selectable*
- *Customized service*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com

Scales&Parts Weighing System

Packers&Parts Packing System

JB

A professional weighing&packing products manufacturer and supplier

Junction Box
















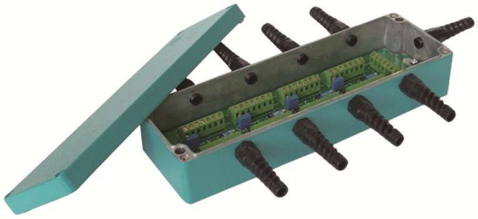





- *Plastic housing/aluminum alloy housing/stainless steel housing selectable*
- *Normal/waterproof/anti-explosion application selectable*
- *4-6-8-10 hole in selectable*
- *Signal or voltage adjustment selectable*

NOVO

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

CS

A professional weighing&packing products manufacturer and supplier

Crane Scale OCS-A/D



OCS-A

6V/10Ah battery
DC9V/1.5A adaptor
＞100h battery life

38mm display



34mm display

Alloy steel shackle and hook




OCS-D

6V/4Ah battery
DC14V/1A adaptor


40mm display




Alloy steel shackle and swivel hook (optional)



OCS-A



OCS-D



OCS-D

Model	Max.cap. (kg)	d (kg)	n	A (mm)	B (mm)	C (mm)	L (mm)	N.W. (kg)
OCS-A (1)	1000	0.5	2000	58	83	30	420	12
OCS-A (2)	2000	1	2000	58	83	30	420	13
OCS-A (3)	3000	1	3000	73	107	33	480	15
OCS-A (5)	5000	2	2500	92	135	45	585	24
OCS-A (10)	10000	5	2000	94	147	60	770	43
OCS-A (15)	15000	5	3000	128	178	75	860	61
OCS-A (20)	20000	10	2000	135	250	75	950	64
OCS-D (1)	1000	0.5	2000	55	96	35	535	10.5
OCS-D (2)	2000	1	2000	55	96	35	535	10.5
OCS-D (3)	3000	1	3000	55	96	35	535	10.5
OCS-D (5)	5000	2	2500	78	123	38	600	14
OCS-D (10)	10000	5	2000	90	123	45	740	21.5

Functions

- *Zero/Tare*
- *Auto power off*
- *Display hold*
- *Unit switch*
- *Voltage display*
- *Resolution switch*
- *Overload warning*

Specification

- *Accuracy class:OIML (III)*
- *Tare range:100%F.S.*
- *Zero range:4%F.S.*
- *Safe overload:120%F.S.*
- *Ultimate overload:400%F.S.*
- *Overload warning:100%F.S.+9e*
- *Temperature range:-10℃~40℃*

Features

- *Precision aluminum alloy case*
- *High strength paint*
- *Alloy steel load cell*
- *Rechargeable battery*
- *Infrared remote control*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

CS

A professional weighing&packing products manufacturer and supplier

Crane Scale OCS-L


OCS-L



Optional colours



OCS-L



Model	Max.cap.		Min.cap.		Degree		Number
	kg	lb	kg	lb	kg	lb	n
OCS-L (003)	30	60	0.2	0.4	0.01	0.02	3000
OCS-L (006)	60	120	0.4	0.8	0.02	0.05	3000
OCS-L (015)	150	300	1	2	0.05	0.1	3000
OCS-L (03)	300	600	2	4	0.1	0.2	3000

Functions

- *Zero/Tare*
- *Auto power off*
- *Display hold*
- *Unit switch*
- *Voltage display*
- *Resolution switch*
- *Overload warning*

Features

- *Precision aluminum alloy case*
- *High strength paint*
- *18mm LCD display*
- *Stainless steel shackle and hook*
- *AA*3 battery*
- *Optional colors*

Specification

- *Accuracy class:OIML (III)*
- *Tare range:100%F.S.*
- *Zero range:4%F.S.*
- *Safe overload:120%F.S.*
- *Ultimate overload:300%F.S.*
- *Overload warning:100%F.S.+9e*
- *Battery:AA*3*
- *Temperature range:-10℃~40℃*
- *N.W.:600g*

NOVO

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice


WCS

A professional weighing&packing products manufacturer and supplier

Wireless Crane Scale OCS-SL



Multi options
RS-232-continuous or on demand data output, user-selectable.
Wireless scoreboard 3/5inch, wireless weighing inidcator
180、380、580 can match with the scale user selectable user-selectable.

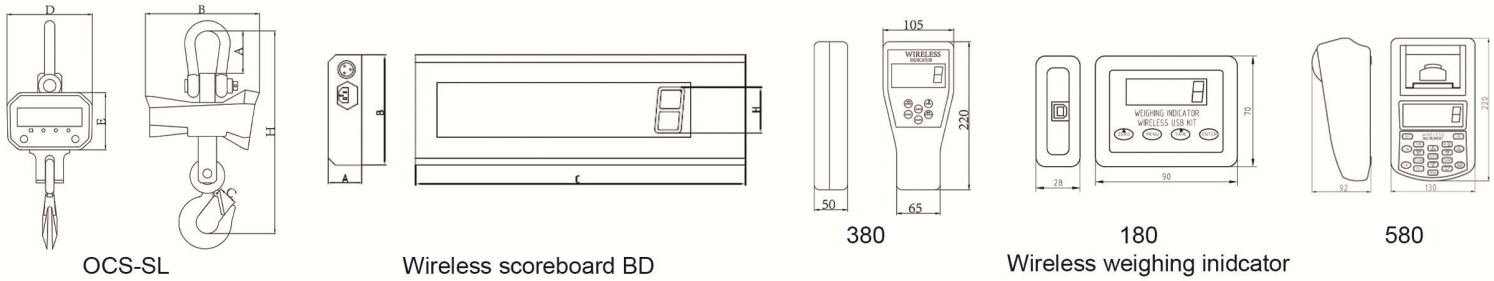

Model	Cap. kg	Resolution kg	A mm	B mm	C mm	D mm	E mm	H mm	N.W. kg
OCS-SL (2)	2000	1	95	260	33	195	135	430	10.5
OCS-SL (3)	3000	2	95	260	40	195	135	455	11.5
OCS-SL (5)	5000	5	120	320	50	240	165	535	17.5
OCS-SL (10)	10000	10	124	325	60	240	165	660	27.5
OCS-SL (15)	15000	10	225	345	70	240	165	855	49
OCS-SL (20)	20000	20	225	345	85	240	165	920	56

Features

- *Enclosure: NEMA 12/IP54 powder coated Foundry Cast Aluminum.*
- *Multi-weighing units:Kg, lb are selectable, kg are default unit.*
- *Multi-function operation: Tare ; Zero ; Auto zero tracking ; Total;Hold;*
- *Overload warning and record, operate through remote controller,etc functions.*
- *User-friendly design: Large red 5 digit LED display (digit height30mm),*
- *Battery Operated with low battery indication, Automatic turnoff , power-saving function.*
- *Special design load cell, threadless connection, more safety.*
- *Gravity regulation:The acceleration of gravity can be regulatedthrough remote controller according to different places value.*

Specification

- *Accuracy Standard: According to OIML class III*
- *Display: 30mm (1.2 ")5digits LED*
- *Filtering: Low,Medium or High selectable*
- *Units: Kilograms or Pounds selectable*
- *Resolution: 2000 to 3000 divisions standard(up to 15,000 available)*
- *Zero Range: 4% F.S.*
- *Tare Range: 100% F.S.*
- *Overload Indication: 100% F.S.+ 9e*
- *Max.Safety Load: 125% F.S.*
- *Ultimate Load: 400% F.S.*
- *Battery Type: Fully sealed Lead-Acid battery, 6V/4.5Ah*
- *Battery Life: >50 hours*
- *Adapter: Dc9v /1000mA*
- *Operating Temperature Range: - 20℃~ + 50°℃*
- *Operating Humidity: ≤85% RH under 20℃*
- *Remote Controller Distance: Max.15m*
- *Battery of Remote Controller: 2 pcs AAA size battery.*
- *Acceleration of Gravity: Can be regulated, the default value is 9.793*

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

CS

A professional weighing&packing products manufacturer and supplier

Crane Scale OCS-Y/XS(E)

OCS-Y



22mm LCD display







Auto power off
Display hold
Unit switch
Voltage display
Resolution switch

Integrated load structure
Waterproof panel
AA*3 battery
Accuracy class ±0.1%F.S.
Optional Bluetooth or wireless indicator

OCS-XS(E)






Voltage display
Tare weight set
Resolution switch
Time set
Acc/Del/View

Aluminum alloy case
Mini printer
ABS portable chassis
RS232 RS485
LCD display
Size: 285*195*63 mm
Rechargeable battery

Alloy steel case
Alloy steel load cell
Alloy steel shackle and hook
Rechargeable battery
Wireless data transmission


Accuracy class OIMLm III
6V/4Ah*2 battery
DC9V/1.5A,DC7.2V/1A adaptor
Wireless frequency 450MHz
Wireless distance >100m

OCS-Y




1-10t

OCS-Y



20-50t

OCS-XS(E)



Model	Max.cap. kg	d kg	n	A mm	B mm	C mm	L mm	Φ mm	N.W. kg	Material
OCS-Y (3)	3000	1	3000	90	30	165	230	25		Aluminum alloy
OCS-Y (5)	5000	2	2500	90	30	165	230	32		Alloy steel
OCS-Y (10)	10000	5	2000	90	48	195	280	32		Alloy steel
OCS-Y (20)	20000	10	2000	126	60	230	350	50		Alloy steel
OCS-Y (30)	30000	10	3000	126	62	232	366	60		Alloy steel
OCS-Y (50)	50000	20	2500	180	70	320	500	72		Alloy steel
OCS-E (XS-1)	1000	0.5	2000	58	83	30	420		20	
OCS-E (XS-3)	3000	1	3000	73	107	33	480		20	
OCS-E (XS-5)	5000	2	2500	92	135	45	585		31	
OCS-E (XS-10)	10000	5	2000	105	140	70	850		51	
OCS-E (XS-15)	15000	5	3000	140	160	75	900		75	
OCS-E (XS-20)	20000	10	2000	150	180	80	950		75	
OCS-E (XS-30)	30000	10	3000	165	215	90	1120		170	
OCS-E (XS-50)	50000	20	2500	180	235	105	1350		390	

Functions

- Zero/Tare
- Overload warning

Specification

- Tare range:100%F.S.
- Zero range:4%F.S.
- Safe overload:120%F.S.
- Ultimate overload:400%F.S.
- Overload warning:100%F.S.+9e
- Temperature range:-10℃~40℃

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

CS

A professional weighing&packing products manufacturer and supplier

Crane Scale OCS-S4/V

OCS-S4






Precision aluminum alloy case
Integrated load structure
*115*41mm LCD/LED display*
Stainless steel shackle and alloy steel hook
*AA*4 battery 3.7V1500mAh(Optional)*
Capacity: 100kg~2000kg

OCS-V







Aluminum die-casting case
Alloy steel load cell
*115*41mm LCD/ILED display*
Alloy steel shackle and hook
Optional clevis hook or swivel hook (1-5t)
Optional waterproof IP66
Optional AA or 18650 lithium battery
*AA*3/lithium battery*
DC5V1A



OCS-S4



OCS-V



OCS-V

Model	Max.cap.		Min.cap.		Degree		Number
	kg	lb	kg	lb	kg	lb	n
OCS-S4 (01)	100	200	1	2	0.05	0.1	2000
OCS-S4 (02)	200	400	2	4	0.1	0.2	2000
OCS-S4 (03)	300	600	2	4	0.1	0.2	3000
OCS-S4 (05)	500	1000	4	10	0.2	0.5	2500
OCS-S4 (1)	1000	2000	10	20	0.5	1	2000
OCS-S4 (2)	2000	4000	20	40	1	2	2000

Model	Max.cap. kg	d kg	n	A mm	B mm	C mm	D mm	E mm	F mm	L mm	H mm
OCS-V (1)	1000	0.5	2000	173	74	50	55	103	33	440	370
OCS-V (2)	2000	1	2000	173	74	50	55	103	33	440	370
OCS-V (3)	3000	1	3000	173	74	50	55	103	33	440	370
OCS-V (5)	5000	2	2500	173	74	55	70	103	33	490	405
OCS-V (10)	10000	5	2000	173	95	85	97	103	43	605	530

Functions

- *Zero/Tare*
- *Auto power off*
- *Display hold*
- *Unit switch*
- *Voltage display*
- *Resolution switch*
- *Overload warning*

Features

- *High strength paint*
- *Infrared remote control*

Specification

- *Accuracy class:OIML (III)*
- *Tare range:100%F.S.*
- *Zero range:4%F.S.*
- *Safe overload:120%F.S.*
- *Ultimate overload:400%F.S.*
- *Overload warning:100%F.S.+9e*
- *Temperature range:-10℃~40℃*

NOVO

Weighing


A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

DD


A professional weighing&packing products manufacturer and supplier

Digital Dynamometer DL-W3






1-5t




10-200t

DL-W

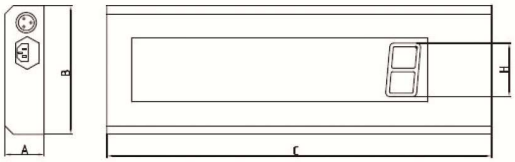

Wireless scoreboard BD



Wireless weighing indicator380

Model	Cap	Div	A mm	B mm	C mm	D mm	Φ mm	H mm	Material
DL-W-1	1t	0.5kg	245	112	38	190	43	335	Aluminum
DL-W-2	2t	1kg	260	123	38	195	51	365	Aluminum
DL-W-3	3t	1kg	260	123	38	195	51	365	Aluminum
DL-W-5	5t	2kg	285	123	56	210	58	405	Aluminum
DL-W-10	10t	5kg	320	120	56	230	92	535	Alloy Steel
DL-W-20	20t	10kg	375	128	74	260	127	660	Alloy Steel
DL-W-30	30t	10kg	420	138	82	280	146	740	Alloy Steel
DL-W-50	50t	20kg	465	150	104	305	184	930	Alloy Steel
DL-W-100	100t	50kg	570	190	132	366	229	1230	Alloy Steel
DL-W-200	200t	100kg	720	265	183	440	280	1362	Alloy Steel

Specification

- *Palm size:220x105x50mm shell with LCD display, wireless double-sided communication(can tare,zero, calibration and parameter setting). 5 digits LCD display with backlight, digitheight : 12mm. Many function on LCD display(battery power,TARE,ZERO,PEAK,Stable).*
- *Battery:4pcs AA size alkaline batteries, 40 hours radio continuous using.*
- *RS-232 communication: Print or exact data easily. Continuous output can drive a score board.*
- *Operating temperature: - 20°C to 60°C*
- *Antenna:Built-in antenna*
- *Update rate from scale: 12 times per second.*
- *Radio Frequency:Standard 2. 4GHz wireless module, up to 70m wireless distance, up to 128 channels available(433MHz, 868MHz wireless module optional).*

Functions

- *Body protection: Aluminum and alloy steel capacities are powder coated.*
- *Accuracy: 0.05% for 1-50t,0.1% for above 50t capacity.*
- *Units:KG/ T/ LB / KN*
- *Battery: 3pcs AA size alkaline batteries, 50 hours radio continuous using.*
- *Display: 25mm (1") 5 digits LCD with backlight for easy distant viewing.*
- *Shackles: High tension industrial standard G2130 anchor shackle bows, galvanized finish.*
- *Ultimate Load: 400% of capacity.*
- *Operation temperature: -20℃ to 50℃*
- *Gravity regulation: The acceleration of gravity can be regulated through wireless indicator according to different places value.*
- *Functions:Zero, tare, Low battery warnings, peak hold, Two user programmable Set-Point can be used for safety and warning applications or for limit weighing.User calibration.*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

WTL

A professional weighing&packing products manufacturer and supplier

Wireless Tension Link EBW-2D


EBW-2D






Wireless weighing inidcator 280

EBW-2D



Wireless weighing inidcator 280



Model	Cap. kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm	2-Φ mm	N.W. kg
EBW-5	5000	190	110	60	137	65	30	70	27	2.6
EBW-10	10000	245	110	70	168	65	36	76	41	4.3
EBW-20	20000	312	110	94	206	65	45	85	54	8.5
EBW-30	30000	370	110	114	246	65	50	90	60	14
EBW-50	50000	460	110	140	309	65	60	100	73	25
EBW-100	100000	580	110	180	389	65	80	120	99	53
EBW-150	150000	690	110	220	456	65	90	130	112	89
EBW-200	200000	800	110	250	534	65	100	140	134	128

Specification

- *Accuracy Standard: According to GB/T11883-2002*
- *280D Indicator Display: 25mm(1") 5 digits LCD with backlight*
- *Sealing Standard: IP67 protected from dust and high pressure jets of water*
- *Stable Time: 5 seconds*
- *Body Battery : Standard 18650 Lithium battery, 3.7V/3100mAh*
- *Indicator Battery: Standard 18650 Lithium battery, 3.7V/3100mAh*
- *Operating Temp.-20C~ + 50'C*
- *Operating Humidity: 85% RH under 20°C*
- *Wireless Distance: About 100M*
- *Wireless Frequency: 433MHz*

Functions

- *EBW-2D wireless tension link is an extremely well- built instrument for industry use ,as a standard wireless tool offer universal applications,Whether used as conventional crane weigher or to measure force, EBW-2D wireless tension link is microprocessor controlled for high precision accuracy, calibration is easier with wireless handheld indicator 280D.*
- *Material: Nickel plated high strength alloy steel.*
- *Accuracy: 0.05% for 1-50t, 0.1% for above 50t capacity.*
- *Units: KG/ T/ LB/ KN*
- *Shackles: High tension industrial standard G2130 anchor shackle bows, galvanized finish.*
- *Gravity regulation: The acceleration of gravity can be regulated through indicator parameter setting according to different places value.*
- *Functions: wireless indicator with many functions: Zero, tare, Low battery warnings, peak hold, overload warning. User calibration(with password).*
- *Set- Point: Two user programmable Set- Point can be used for safety and warning applications or for limit weighing.*
- *Package: Packed with carry case, easy to bring.*
- *Communication: RS232 output*
- *Power on zero range:20% F.S.; Manual Zero Range: 4% F.S.; Tare Range:100% F.S.; Overload Indication: 100% F.S. + 9e; Max. Safety Load:125% F.S.; Ultimate Load: 400% F.S..*

Weighing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com

Scales&Parts Weighing System

Packers&Parts Packing System

ESM

A professional weighing&packing products manufacturer and supplier

Egg Sorting Machine



Reliable conveyor with silicon rubber seat to ensure each egg in good position



Check area with light and shield to ensure each egg is good



Full stainless steel material



Step 1

Manual egg loading to conveyor

Step 2

Light check to select out "NG" egg

Step 3

Weighing sorting in principle of mechanical weighing

Step 4

Manual pack

- *Machine material : stainless steel applicable to food industry*
- *Sorting speed: 5400pcs/hour high effiency*
- *Machine power: 400W*
- *Working voltage: 220V*
- *Sorting grades: 5 levels changeable according to end site's requirement*
- *Weighing method: mechanical weighing to avoid disturbance from enviroment*
- *Accuracy: 1g*
- *Divsion: 1g/2g/5g/10g/20g/50g adjustable*

Weighing

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System

MCVC

A professional weighing&packing products manufacturer and supplier

Dual CIS Multi Currency Value Counter



Optional printer with display



Side display



CIS Tech



Back side



Specification

Hopper Capacity	500 bills
Stacker Capacity	200 bills
Counting Speed	800,1000pcs/min(MDC & SDC MODE) 800,1000,1200pcs/min (CNT MODE only)
Dimension	260x230×240mm
Power Supply	AC 100-240V 50-60Hz
Size of Countable Notes	50x110-90x190 mm
Thickness of Countable Notes	0.075-0.15 mm
Net Weight	6.5 kg
Gross Weight	7.5 kg
Power Consumption	⩽80W

Features

- *Mix value counting of multi currency*
- *Auto currency identification*
- *Counterfeit Detection: Image,Magnetic, Infrared, Ultraviolet*
- *Error Detection:Double Note Detection, Half Note Detection, Chain Note Detection*
- *Serial numbers reading*
- *Available currencies select: USD, EUR, GBP, RUB, CHF, MOP, THB, CAD, HKD,JPY, KRW, THB.SGD.... up to 60*
- *Options: Side display/Printer/PC connection*
- *Interface: RS-232,USB,RJ-11*
- *Multi language interface*
- *Touch panel and 3.5inch TFT display(AL-920)*
- *Touch panel and 4.5inch TFT display(AL-920A)*

NOVO

Tool

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

PT

A professional weighing&packing products manufacturer and supplier

Platform trolley










Steel pipe handrail




Directional wheel&universal wheel for easy walking



Plastic platform



Reinforced spring connection structure



Portable&foldable



Type	Size	Capacity
Normal type	50*70*84cm	Up to 150kg
	60*90*84cm	Up to 300kg
	62*103*84cm	Up to 500kg
Business type	50*70*84cm	Up to 150kg
Business type	60*90*84cm	Up to 300kg

- *Durable&reliable;*
- *High quality material, great load capacity, not easy to deform*
- *Directional wheel&universal wheel for easy walking;*
- *Portable&foldable;*
- *Easy to store and save space;*
- *Steel pipe handrail;*
- *Reinforced spring connection structure;*
- *Plastic platform;*
- *Mute without noise;*
- *Normal type&business type selectable;*
- *Size, platform steel material customized*

Tool

NOVO

A professional weighing&packing products manufacturer and supplier

For more info, please contact our sales engineer


All rights reserved, specifications subject to change without notice

APS

A professional weighing&packing products manufacturer and supplier

Aluminum Pedal Sealer





Double side sealing(up&down)



Single side sealing(down)









Clear operation panel



Powerful transformer



Heating steel 8MM width



Adjustable loader



APS series pedal impulse sealers are widely used in such industries as foodstuff, special local products, tea,medicine, hardware etc. They are most convenient and economical sealing equipments for shops,families and factories.

Model	350*1	350*2	450*1	450*2	650*1	650*2	800*1	800*2	1000*1	1000*2
Impulse power	800W	1200W	1000W	1200W	1800W	2000W	2000W	2400W	2200W	2600W
Weight	19kg	20kg	21kg	22kg	23kg	24kg	30kg	31kg	35kg	36kg
Sealing length	35cm	35cm	45cm	45cm	65cm	65cm	80cm	80cm	100cm	100cm
Sealing width	8mm									
Heating time	0.2-2s									
Power supply	220V/50Hz									

NOVO

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

Packing


SVM

A professional weighing&packing products manufacturer and supplier


Single Chamber Vacuum Machine







Double Sealing Bar



Single Sealing Bar

Chamber Size		L(mm)	H(mm)	W(mm)
SVM260		320	50	260
SVM400T	D	400	75	340
	S	400	75	390
SVM400	D	400	75	340
	DP	400	150/200/300	320
	S	400	75	390
SVM500	D	500	75	420
	DP	500	150/200/300	450
	S	500	75	470
SVM600	D		75	550
	DP	600	150/200/300	520
	S	600	75	580

S-Single sealing bar; D-Double sealing bar; DP-Deepened type

Type	Single Chamber							
	Normal type					Deepened type		
	260 Mini Type	400 Table Type	400	500	600	400	500	600
Model	SVM260	SVM400T	SVM400	SVM500	SVM600	SVM400/DP	SVM500/ DP	SVM600/DP
Sealing bar	260×8mm×1	400×10mm×1/2	400×10mm×1/2	500×10mm×1/2	600×10mm×1/2	400×10mm×2	500×10mm×2	600×10mm×2
Capacity	10m³/h	20m³/h	20m³/h	20m³/h	20m³/h	20m³/h	20m³/h	20m³/h
Cycle time	10-20sec	10-25sec	10-25sec	10-25sec	10-25sec	10-25sec	10-25sec	10-25sec
Voltage	220V/50HZ	220V/50HZ	220V/50HZ	220V/50HZ	220V/50HZ	220V/50HZ	220V/50HZ	220V/50HZ
Power	0.4KW	0.9KW	0.9KW	0.9KW	0.9KW	0.9KW	0.9KW	0.9KW
Machine size	540×340×360mm	540×490×660mm	540×490×960mm	650×570×960mm	750×690×980mm	540×490×960mm	650×570×960mm	750×690×980mm
Machine weight	31kg	59kg	67kg	84kg	110kg	67kg	88kg	120k

- *Stainless steel body*
- *Stainless steel vacuum chamber*
- *High efficiency*
- *Applied for seafood and meat industry*
- *Micro-computer control/relay control selectable*

Packing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

DVM

A professional weighing&packing products manufacturer and supplier


Double Chamber Vacuum Machine










Flat Type



Groove Type



DVM400/2SF




DVM500/2SF



DVM600/2SF



DVM500/2SG



DVM600/2SG

Type	Double Chamber				
	Flat Type			Groove Type	
	400	500	600	500	600
Model	DVM400/2SF	DVM500/2SF	DVM600/2SF	DVM500/2SG	DVM600/2SG
Sealing bar	400×10mm×2/4	500x10mmx2/4	600×10mm×2/4	500×10mm×4	600×10mm×4
Capacity	2*20m³/h	40m³/h	40m³/h	40m³/h	40m³/h
Cycle time	10-25sec	10-40sec	10-40sec	10-40sec	10-40sec
Voltage	220V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ	380V/50HZ
Power	0.9KW	0.9KW	0.9KW	0.9KW	0.9KW
Machine size	1000×640×880mm	1200×720×920mm	1400×720×920mm	1200×720×960mm	1400×720×960mm
Machine weight	104kg	152kg	165kg	152kg	165kg

- *Stainless steel body*
- *Stainless steel vacuum chamber*
- *High efficiency*
- *Applied for seafood and meat industry*
- *Micro-computer control/relay control selectable*

Packing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

SASM

A professional weighing&packing products manufacturer and supplier

Semi–auto Strapping Machine



Table Type



Box Type



Side Type

Type	Double driving motor type				Single driving motor type				Side Type
Model	SASM-80	SASM-80L	SASM-86	SASM-86L	SASM-90	SASM-90L	SASM-92	SASM-92L	SASM-93
Feature	Table type,high	Table type,low	Box type,high	Box type,low	Box type,high	Box type,low	Table type,high	Table type,low	Single driving motor
Power supply	110V/50HZ ; 220V/60HZ								
Driving motor	24V DC				220V/180W		Single Phase 1/4HP		
Max. Tension	45KGS				60KGS				
Width of PP strap	6~15MM								
Min. package size	60MM								
Max. package size	Any size								
Strapping speed	1.5 Sec./Strap								
Strap coil size	200MM								
Machine Size	900*560*730	900*560*460	900*560*730	900*560*460	895*565*735	895*565*460	895*565*735	895*565*400-500	880*675*1650
Weight	70kg	65kg	70kg	65kg	80kg	80kg	80kg	70kg	120kg

- *Single/double driving motor selectable*
- *Fast strapping speed 1.5 sec./cycle, easy operation*
- *Instant heating design, only 5 seconds to make the heating blade works*
- *Stop motor automatically 60 seconds no operation(Single driving motor type)*
- *Stop motor automatically after strapping(Double driving motor type)*
- *Convenient strapping tension adjustment from exterior(Single driving motor type)*
- *Convenient strapping tension adjustment by relay(Double driving motor type)*
- *Low table height applied for heavy or bulky products*
- *All model height adjustable except box type*
- *Side type applied for seafood and meat industry*

NOVO

Packing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

www.novoweigh.com Scales&Parts Weighing System Packers&Parts Packing System

FASM

A professional weighing&packing products manufacturer and supplier

Fully–auto Strapping Machine




Side Strapping Type



Low Table Type



High Table Type



Fast Strapping Speed

Type	High Table Type		Low Table Type		Fast Strapping Speed		Side Strapping Type	
Model	FASM-101	FASM-102	FASM-201	FASM-202	FASM-801	FASM-802	FASM-301	FASM-302
Feature		With rollers		With rollers	High table	Low table		With conveyors
Power supply	1PH 100-240V/50/60HZ ; 3PH 200-380V/50/60HZ							
Max. Tension	80KGS				5-60KGS adjustable		80KGS	
Arch size	850*600MM				800*500MM		600*850MM	
Table height	Standard 760MM(Min 650MM)		450MM		750MM	550MM	450MM	
Width of PP strap	9-18MM				8-15MM		9-18MM	
Min. package size	100MM				80MM		100MM	
Strapping speed	2 Sec./Strap	5 Sec./Strap	2 Sec./Strap	5 Sec./Strap	1.8 Sec./Strap		2 Sec./Strap	5 Sec./Strap
Strap coil size	200-250MM	200-250MM						
Machine Size(W*D*H MM)	1410*600*1500	1500*700*1540	1880*600*1200	1880*700*1200	1350*600*1400	1650*600*1200	1400*640*1740	1430*640*1740
Weight	230kg	300kg	280kg	350kg	160kg	200kg	260kg	260kg

- *Modular structure, easy to assemble and disassemble*
- *Size of arch can be customized*
- *Easy operation with manual/auto mode selectable, operation table/pedal switch selectable*
- *Low table applied to strap extra heavy packages*
- *For model with rollers or conveyors, equipped with photoelectric switch to control goods loading and strapping*
- *For model with rollers or conveyors, automatically load goods to table and strap it then send out goods*
- *Advanced accuracy,compact structure,low noise,low malfunction, durable(FASM-801/ FASM-802 model)*
- *Fast strapping speed,1.8 Sec./cycle by using standard arch(FASM-801/ FASM-802 model)*
- *Side type applied for seafood and meat industry(FASM-301/ FASM-302 model)*

Packing

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

GMA

A professional weighing&packing products manufacturer and supplier

Grain Moisture Analyzer



Serial Number	Name	Serial Number	Name
NO. P0	Paddy	NO. P10	Peanut kernel
NO. P1	Soybean	NO. P11	Sorghum
NO. P2	Wheat	NO. P12	Black sesame
NO. P3	Rapeseed	NO. P13	Sunflower seed
NO. P4	Corn	NO. P14	Watermelon seed
NO. P5	Barley	NO. P15	Cottonseed
NO. P6	Indica rice	NO. P16	Soybean meal
NO. P7	Rice	NO. P17	Cottonseed meal
NO. P8	Large corn	NO. P18	Rapeseed meal
NO. P9	White wheat	NO. P19	Pellet feed

- *Fast, accurate and convenient*
- *Both AC/DC power supply*
- *LCD with white backlight, clear and bright*
- *Multi-point calibration, error correction*
- *Low power consumption, automatic power off, energy saving,*
- *Automatic weighing and temperature compensation*
- *Translated density display, moisture mean value calculation*
- *Measuring range:3%~35‰*
- *Error: ≤±0.5%*
- *Repeat error:≤0.2%*
- *Measuring time:≤10S*
- *Working temp:0~40℃*

Tool

NOVO
A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice

HTMD

A professional weighing&packing products manufacturer and supplier

Hand type Moisture Detector





Hand type



Double detector



Big LED display



Voice speaker



Serial Number	Name	Serial Number	Name
NO.P0	Seed cotton	NO.P7	Peanut
NO.P1	Paddy	NO.P8	Rice
NO.P2	Soybean	NO.P9	Sorghum
NO.P3	Wheat	NO.P10	Sesame
NO.P4	Rapeseed	NO.P11	Feed
NO.P5	Corn	NO.P12	Melon seed
NO.P6	Barley	NO.P13	Soybean meal

- *Up to 14 kinds of material*
- *Fast measurement*
- *Easy operation*
- *Voice speaker*
- *Stable data*
- *Measuring range:1%~49%*
- *Resolution:0.1%*
- *Error: ±0.5%*
- *Temp Compensate:-9%~15%*
- *Working temp:-25℃~50℃*
- *Power:Dry battery*

Tool

A professional weighing&packing products manufacturer and supplier
@Building 1, 5500 Yuanjiang Road, Minhang District, Shanghai, China
For more info, please contact our sales engineer
All rights reserved, specifications subject to change without notice